

Sunny Boy 700U



The leading grid-tied photovoltaic inverters in Europe and America



UL 1741 Listed for grid interactive inverters

5-year comprehensive warranty standard

Rugged NEMA 4X stainless steel enclosure standard

Exceptional reliability and energy capture ratio


Easy to install three-point mounting system

Comprehensive communications and data collection options

SMA's modular string inverter design is expandable to virtually any size system

The SMA Sunny Boy inverter, the most popular grid-tied photovoltaic inverter in Europe, is now UL 1741 Listed and available in North America. Sunny Boy's extensive track record in some of the world's most demanding markets has made it a favorite among PV professionals everywhere. Over 250,000 Sunny Boy inverters have been installed worldwide. Superior design, rock-solid German engineering and exceptional real-world efficiency have made Sunny Boy the top choice for American solar designers.



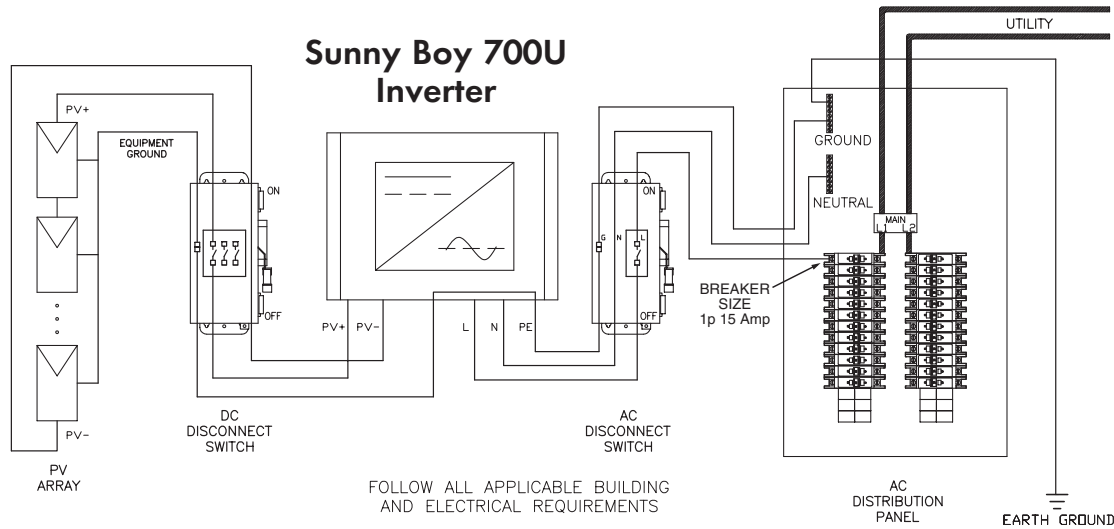

Sunny Boy's unsurpassed reliability and efficiency are the result of SMA's manufacturing philosophy that combines simple design with robust execution. SMA's state-of-the-art maximum power point tracking performance results in greater real-world energy capture than any other grid-tied inverter. Sunny Boy's safety and reliability record is also exceptional due, in part, to the inverter's redundant grid monitoring and built-in ground fault detection and interruption protection. The inverter's IGBT power stage generates a nearly perfect sine wave with the lowest harmonic distortion in the industry and meets ultra-strict FCC EMC standards. SMA's unique String Inverter technology makes future system expansion simple. SMA advanced communication options are available to satisfy almost any application.

Specifications

Inverter Technology	Real sine-wave, current source, high frequency PWM	Enclosure	NEMA 4X (IP65) Stainless Steel
AC Input Voltage	106 - 132 (120V)	Dimensions	12.68W x 12.60H x 7.09D in 322W x 320H x 180D mm
AC Input Frequency	59.3 - 60.5 (60Hz)	Weight	42.87 lbs (16 kg)
Max. Peak Power Tracking Voltage	250/200/150V DC	Compliance	UL 1741, E210376, UL 1998, IEEE 519, IEEE 929, ANSI C62.41 C1 & C3, FCC part 15 A & B
Min. Peak Power Tracking Voltage	123/100/77V DC		
Maximum DC Input Voltage	250V DC		
Maximum Array Input Power	1000/840/640** (DC@STC)		
Maximum AC Power Output	700/600/460W**		
Current THD	< 3%		
Power Factor	Unity		
Peak Inverter Efficiency	93.6/93.3/92.4%	* Optional external fan (Sunny Breeze) available	
Cooling	* Convection cooling (no fan)	** Jumper setting adjustable	
PV Start Voltage	150/125/95V DC		
Maximum AC Output Current	4.3/5.7/6.6A	SMA America, Inc	
Maximum DC Input Current	7A	12438-C Loma Rica Dr.	
DC Voltage Ripple	< 5%	Grass Valley, CA. 95945	
Power Consumption	0.1W nighttime, < 4W standby	Tel: 530.273.4895	
Ambient Temperature Rating	45°C	Fax: 530.274.7271	
		www.sma-america.com	

Distributed by:


(800) 967-6917
www.dcpower-systems.com

Solar Today...
Energy Tomorrow

